




FEATURES & BENEFITS

- Maintenance free
- no gas charging
- Flow through design isolates pump from system
- Designs can include virtually no pressure drop
- Operates across broad pressure ranges
- Dampens both flow & acceleration pulsations
- Split shell design allows for cellular tub inspection and/or replacement
- Nozzle arrangements to accommodate installation requirements
- Inlet/outlet nozzles can be different
- Elbows can be added
- Vent and drain connections available
- Corrosion resistant materials available
- Reduced "Total System" cost



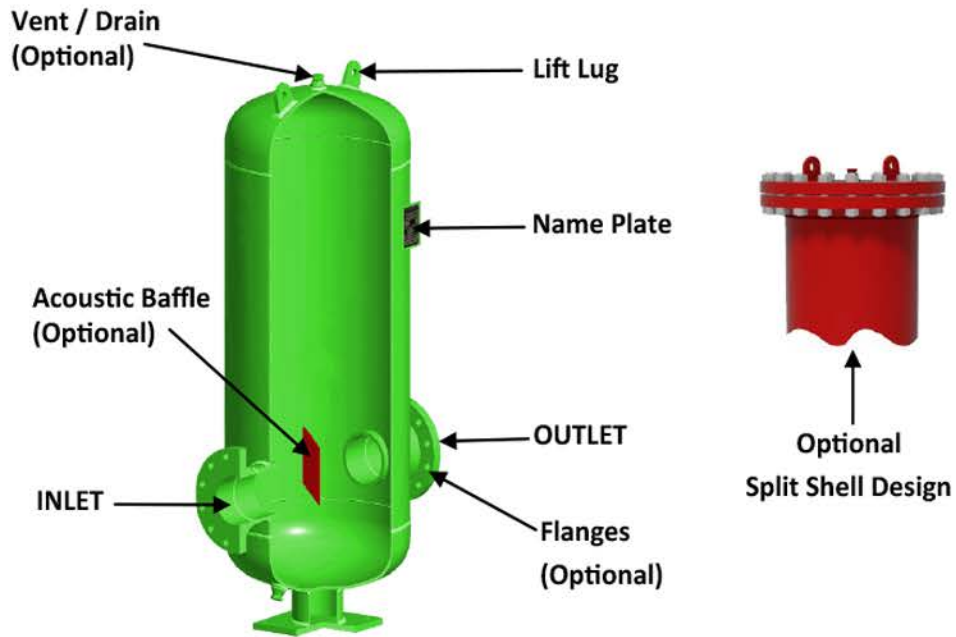

MODELS	Standard Pressure Ranges up to 1,000 psi
VTDC-03	Standard Pressure Ranges up to 1,000 psi
VTDC-05	
VTDC-10	Designs Available at High Pressures - Up to 3,600 psi and Above
VTDC-15	
VTDC-25	PPC also offers custom engineered solutions & sizes for special customer requirements
VTDC-40	
VTDC-80	

