





## FEATURES & BENEFITS

- ❖ Maintenance Free - No Gas Charging
- ❖ Flow Through Design Isolates Pump From System
- ❖ Contained Liquid Volume Virtually Eliminates Acceleration Pressure Losses
- ❖ Increased NPSH Available
- ❖ Virtually No Pressure Drop
- ❖ Operates Across Broad Pressure Ranges
- ❖ Vent and Drain Connections Available

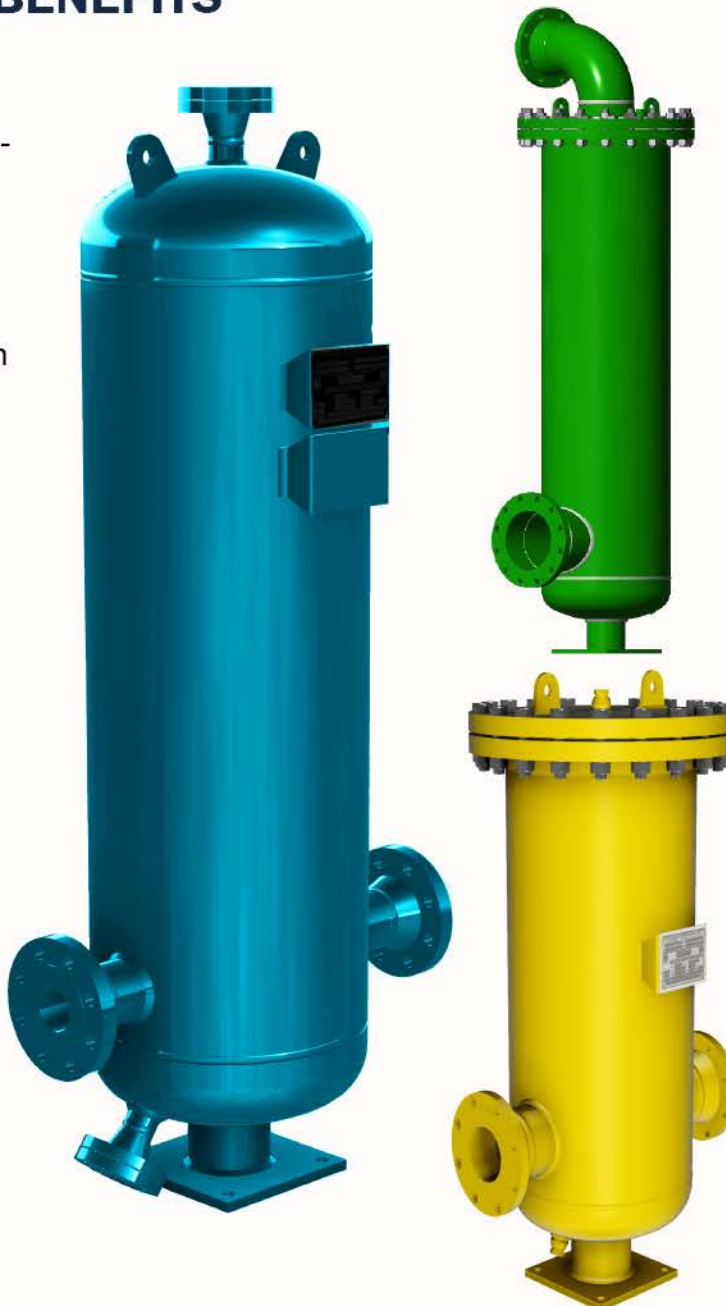

- ❖ Split Shell Design Allows for Cellular Tube Inspection and/or Replacement
- ❖ Nozzle Arrangements to Accommodate Installation Requirements
- ❖ Inlet/Outlet Nozzles Can Be Different Elbows Can Be Added
- ❖ Can Accommodate Harsh Flow Streams
- ❖ Corrosion Resistant Materials Available
- ❖ Reduced "Total System" Cost

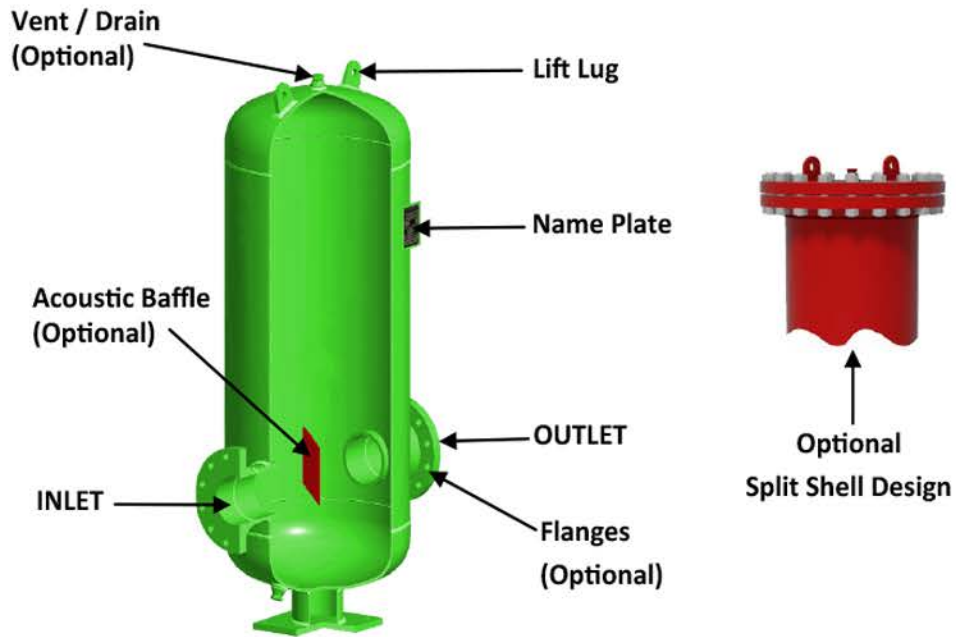

MODELS	Standard Pressure Ranges up to 275 psi
VTSC-03	Designs Available at High Pressures -
VTSC-05	
VTSC-10	Up to 3600 psi and Above
VTSC-15	<i>PPC also offers custom engineered solutions &amp; sizes for special customer requirements</i>
VTSC-25	
VTSC-40	
VTSC-80	

